

Definite Purpose Contactors

Product HVAC Contactor


Purpose Definite purpose contactors can be used for heating, air conditioning, refrigeration, data processing, and food service equipment. Quick connect terminals provide for easy wiring. This contactor comes as a two pole on a small frame.

Features

- Easy to install.
- Cost effective.

General Specifications

- Warranty - 1 year
- Mounting Type - Foot
- UL Recognized

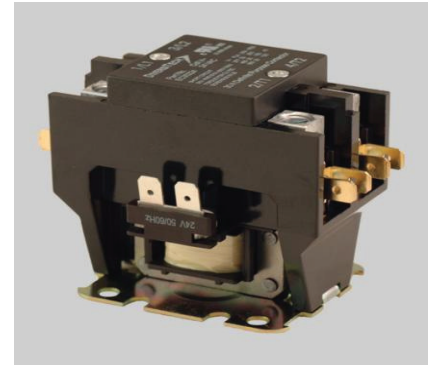

General Characteristics

| Model | Dimensions | # of Poles | Coil Voltage | Amps | Weight |
|----------|---|------------|--------------|------|----------|
| EC252120 | D = 4.53 in W = 3.11 in H = 2.66 in | 2 | 120 V | 25 | 0.8 lbs |
| EC25224 | D = 3.62 in W = 2.64 in H = 2.17 in | 2 | 24 V | 25 | 0.68 lbs |
| EC252240 | D = 3.62 in W = 2.64 in H = 2.17 in | 2 | 240 V | 25 | 0.68 lbs |
| EC252277 | D = 2.64 in W = 2.17 in H = 3.62 in | 2 | 277 V | 25 | 0.88 lbs |
| EC302120 | D = 3.75 in W = 2.25 in H = 2.63 in | 2 | 120 V | 30 | 0.68 lbs |
| EC30224 | D = 3.75 in W = 2.50 in H = 2.75 in | 2 | 24 V | 30 | 0.80 lbs |
| EC302240 | D = 3.63 in W = 2.75 in H = 2.25 in | 2 | 240 V | 30 | 0.80 lbs |
| EC402120 | D = 3.25 in W = 2.50 in H = 2.75 in | 2 | 120 V | 40 | 0.60 lbs |
| EC40224 | D = 3.75 in W = 2.25 in H = 2.75 in | 2 | 24 V | 40 | 0.60 lbs |
| EC402240 | D = 3.50 in W = 2.75 in H = 2.50 in | 2 | 240 V | 40 | 0.60 lbs |

