

Product Family

T14 Series Transformers

Class 2, UL 1585 Recognized



T1404

Description

These transformers provide the power source for heating, air conditioning, or refrigeration systems. They are multi-mounted with wire connection secondary.

Features

- Cost effective
- Easy to install
- UL 1585 Recognized



Application

HVAC power source

Specifications

Primary Voltage:

120 VAC
120/208/240 VAC

Operating Temperature:

23° F – 86° F
-5°C - 30°C

Secondary Voltage:

24 VAC

Mounting:

Multi-foot Mounting

VA:

40 VA

Certifications:

UL 1585 Recognized


Lead Wire:

18 AWG, 9.8 in


Warranty:

1 year

Wiring Diagrams

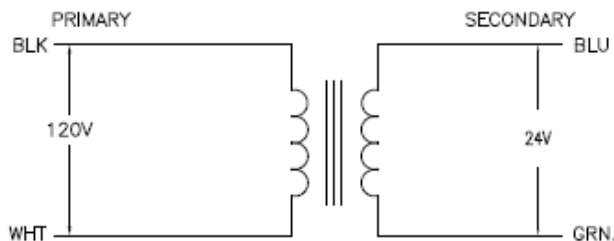

T1401

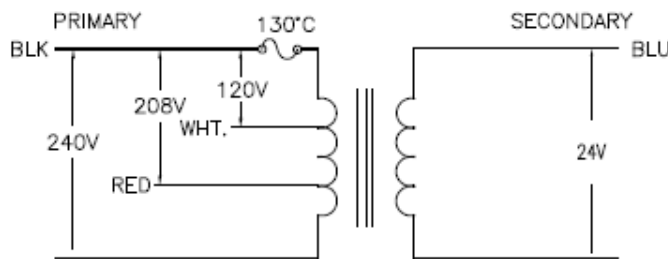

T1404

STOCK NO	VA	Primary Voltage (VAC)	Secondary Voltage (VAC)	Dimensions (in)	Weight (lbs)	Mounting
T1401	40	120	24	H = 4.0, W = 2.5, D = 2.5	1.49	Foot
T1404	40	120/208/240	24	H = 2.5, W = 2.5, D = 3.75	1.5	Foot



Simplify The Way You Work

6650 Sugarloaf Parkway, Duluth, GA 30097 Phone: 800-955-2222 Fax: 678-542-3700 www.diversitech.com

© 2015 Diversitech Corporation

All rights reserved.

Rev. 08/22/16

Page 1 of 1