

Product Family

T24 Series Transformers
Class 2, UL 1585 Recognized

Description

These transformers provide the power source for heating, air conditioning, or refrigeration systems.



T2403



T2404



Features

- Cost effective
- Easy to install
- UL 1585 Recognized

Application

HVAC power source

Specifications

Primary Voltage:

120 VAC
208/240 VAC
120/208/240 VAC

Operating Temperature:

23° F – 86° F
-5°C - 30°C

Secondary Voltage:

24 VAC

Mounting:

Foot Mounting

Certifications:

UL 1585 Recognized

VA:

40 VA

Warranty:

1 year




Lead Wire:

18 AWG, 9.8 in

Connection:

Screw Terminal (T2403)

Wiring Diagrams

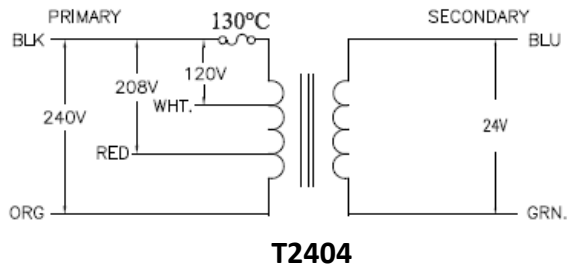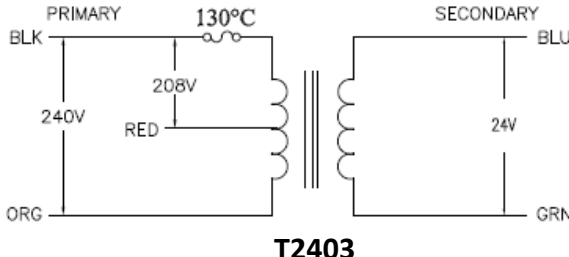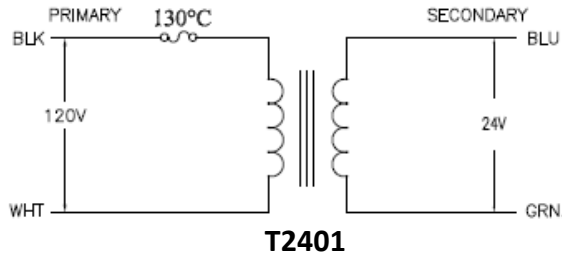

STOCK NO	VA	Primary Voltage (VAC)	Secondary Voltage (VAC)	Current	Dimensions (in)	Weight (lbs)	Mounting
T2401	40	120	24		H = 2.5, W = 2.5, D = 3.75	1.8	Foot
T2403	40	208/240	24		H = 2.5, W = 2.5, D = 3.75	1.8	Foot
T2404	40	120/208/240	24	Circuit breaker	H = 2.5, W = 2.5, D = 4.0	1.91	Foot



Simplify The Way You Work

6650 Sugarloaf Parkway, Duluth, GA 30097 Phone: 800-955-2222 Fax: 678-542-3700 www.diversitech.com

© 2015 Diversitech Corporation

All rights reserved.