

Product Family

T67 Series Transformers
Class 2, UL 1585 Recognized



T6752



T6753



T7752

Description

These transformers provide the power source for heating, air conditioning, or refrigeration systems. They are heavy duty with an external fuse (T67XX) or circuit breaker (T77XX)

Features

- Cost effective
- Easy to install
- UL 1585 Recognized



Application

HVAC power source

Specifications

Primary Voltage: 120/208/240 VAC
120/208/240/480 VAC

Operating Temperature: 23° F – 86° F
-5°C - 30°C

Secondary Voltage: 24 VAC

Mounting: Multi-foot Mounting




VA: 75 VA

Certifications: UL 1585 Recognized

Lead Wire: 18 AWG, 9.8 in

Warranty: 1 year

Wiring Diagrams

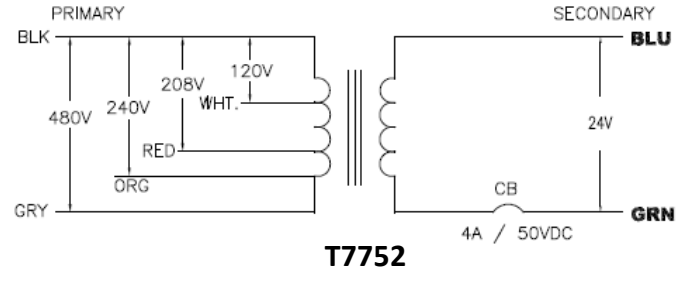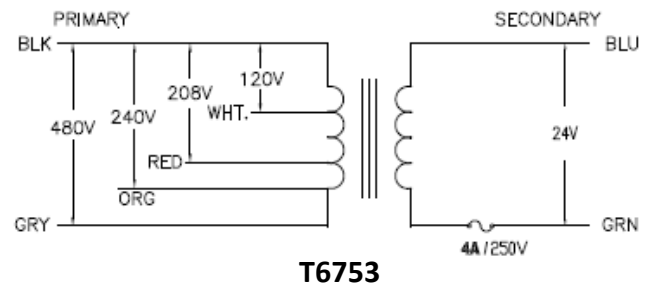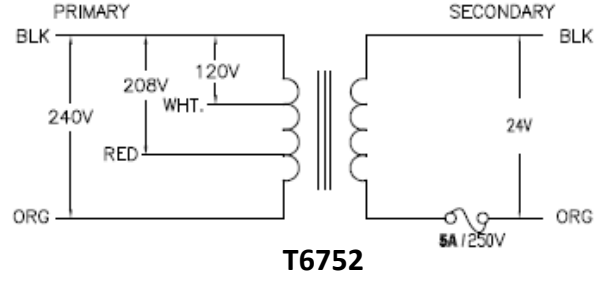

STOCK NO	VA	Primary Voltage (VAC)	Secondary Voltage (VAC)	Current	Dimensions (in)	Weight (lbs)	Mounting
T6752	75	120/208/240	24	External Fuse	H = 3.25, W = 2.75, D = 5.25	3.6	Multi-Foot
T6753	75	120/208/240/480	24	External Fuse	H = 3.75, W = 3.0, D = 16.5	3.63	Multi-Foot
T7752	75	120/208/240/480	24	Circuit breaker	H = 3.25, W = 2.75, D = 5.25	3.69	Multi-Foot



Simplify The Way You Work

6650 Sugarloaf Parkway, Duluth, GA 30097 Phone: 800-955-2222 Fax: 678-542-3700 www.diversitech.com

© 2015 Diversitech Corporation
All rights reserved.