

Product Family

D90 & D90Q
Series Relays

Description

General Purpose Relays

Features

- Quick connect terminals
- Universal mounting
- Break-away tabs
- UL Recognized

Specifications

Primary Voltage:

24V
120V
240V

Mounting:

Universal

Certifications:

UL Recognized

Warranty:

1 year



D90-290Q



D90-360



**D90-291Q, D90-292Q, D90-295Q
D90-374**



**D90-370, D90-372, D90-380,
D90-382, D90-384**



D90-293Q, D90-294Q

STOCK NO	Description	Voltage	Amps	Switch Type	Dimensions (in) (DxWxH)	Weight (lbs)	Mounting
D90-290Q	Relay, 24VAC, 16/8AMP, SPST-NO	24V	16/8 Amp	Single-Pole-Single-Throw, Normal-Open	3 x 2 x 1.75	0.178	Universal
D90-291Q	Relay, 120VAC, 16/8AMP, SPST-NO	120V	16/8 Amp	Single-Pole-Single-Throw, Normal-Open	3 x 2 x 1.75	0.2	Universal
D90-292Q	Relay, 240VAC, 16/8AMP, SPST-NO	240V	16/8 Amp	Single-Pole-Single-Throw, Normal-Open	3 x 2 x 1.75	0.2	Universal
D90-293Q	Relay, 24VAC, 8/8AMP, SPDT	24V	8/8 Amp	Single-Pole-Double-Throw	3 x 2 x 1.75	0.186	Universal
D90-294Q	Relay, 120VAC, 8/8AMP, SPDT	120V	8/8 Amp	Single-Pole-Double-Throw	3 x 2 x 1.75	0.186	Universal
D90-295Q	Relay, 240VAC, 8/8AMP, SPDT	240V	8/8 Amp	Single-Pole-Double-Throw	3 x 2 x 1.75	0.2	Universal



Simplify The Way You Work

6650 Sugarloaf Parkway, Duluth, GA 30097 Phone: 800-955-2222 Fax: 678-542-3700 www.diversitech.com

© 2016 Diversitech Corporation



All rights reserved.

Rev. 10/04/16



Page 1 of 2

STOCK NO	Description	Voltage	Amps	Switch Type	Dimensions (in) (DxWxH)	Weight (lbs)	Mounting	Max Voltage
D90-360	Relay, 24VAC, 12/60FLA @125V, 8/48FLA @250V, 18AMP, SPST-NO	24V	18 Amp	Single-Pole-Single-Throw, Normal-Open	3 x 2 x 1.75	0.2	Universal	FLA/LRA@125V - 12/60, FLA/LRA@250V - 8/48
D90-370	Relay, 24VAC, 12/60FLA @125V, 8/48FLA @250V, 18AMP, SPDT	24V	19 Amp	Single-Pole-Double-Throw	3 x 2 x 1.75	0.186	Universal	FLA/LRA@125V - 12/60, FLA/LRA@250V - 8/48
D90-372	Relay, 120VAC, 12/60FLA @125V, 8/48FLA @250V, 18AMP, SPDT	120V	20 Amp	Single-Pole-Double-Throw	3 x 2 x 1.75	0.2	Universal	FLA/LRA@125V - 12/60, FLA/LRA@250V - 8/48
D90-374	Relay, 240VAC, 12/60FLA @125V, 8/48FLA @250V, 18AMP, SPDT	240V	21 Amp	Single-Pole-Double-Throw	3.75 x 1.75 x 1.75	0.2	Universal	FLA/LRA@125V - 12/60, FLA/LRA@250V - 8/48
D90-380	Relay, 24VAC, 12/60FLA @125V, 8/48FLA @250V, 18AMP, SPST NO+NC	24V	22 Amp	Single-Pole-Single-Throw, Normal-Open, Normal-Close	3 x 2.9 x 1.6	0.192	Universal	FLA/LRA@125V - 12/60, FLA/LRA@250V - 8/48
D90-382	Relay, 120VAC, 12/60FLA @125V, 8/48FLA @250V, 18AMP, SPST NO+NC	120V	23 Amp	Single-Pole-Single-Throw, Normal-Open, Normal-Close	3 x 2 x 1.75	0.2	Universal	FLA/LRA@125V - 12/60, FLA/LRA@250V - 8/48
D90-384	Relay, 240VAC, 12/60FLA @125V, 8/48FLA @250V, 18AMP, SPST NO+NC	240V	24 Amp	Single-Pole-Single-Throw, Normal-Open, Normal-Close	3 x 2 x 1.75	0.2	Universal	FLA/LRA@125V - 12/60, FLA/LRA@250V - 8/48

Drawings

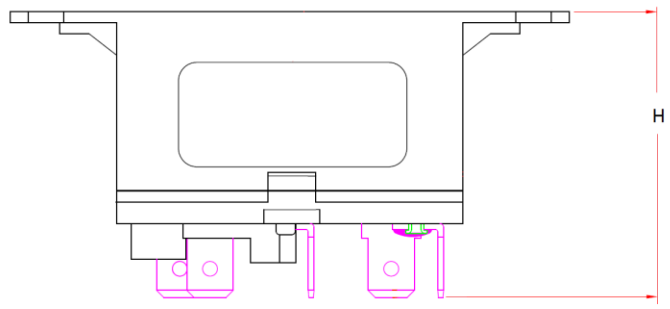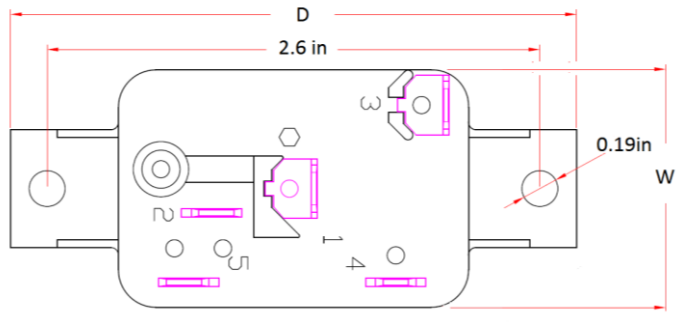

D90Q Series

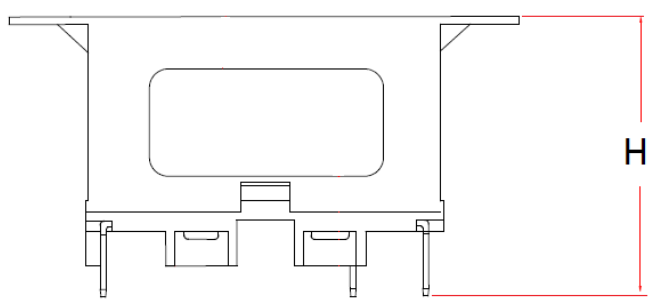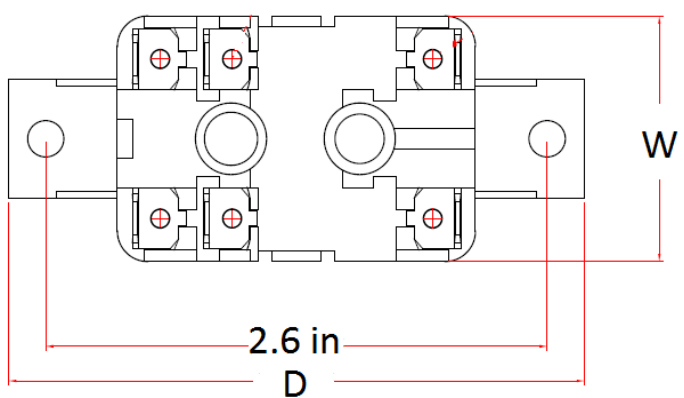

D90 Series



Simplify The Way You Work

6650 Sugarloaf Parkway, Duluth, GA 30097 Phone: 800-955-2222 Fax: 678-542-3700 www.diversitech.com

© 2016 Diversitech Corporation

All rights reserved.

Rev. 10/04/16

Page 2 of 2