

Braided Vinyl Tubing

October 2017



Product

Braided Vinyl Tubing

Advantages

Applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.

- Several sizes from 1/4" to 3/4" diameter
- Non-toxic clear vinyl chloride
- Maximum service temperature 140° F (60° C)
- Extra rigid design resists crimping and kinking due to durometer value of 78-80 (shore A).

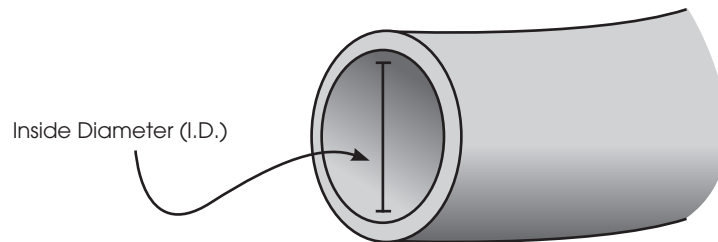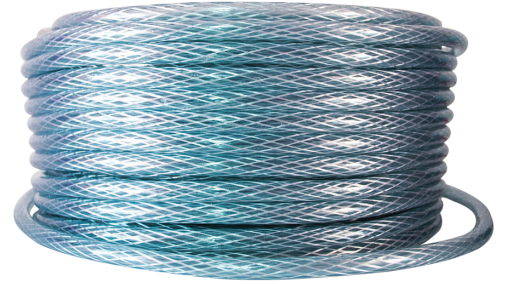

ITEM #	DESCRIPTION	ORDER MULTIPLE
7-14B	1/4", .250" I.D.. Braided Reinforced Vinyl Tubing	100ft./box
7-38B	3/8", .375" I.D.. Braided Reinforced Vinyl Tubing	100ft./box
7-12B	1/2", .500" I.D.. Braided Reinforced Vinyl Tubing	100ft./box
7-58B	5/8", .625" I.D.. Braided Reinforced Vinyl Tubing	100ft./box
7-34B	3/4", .750" I.D.. Braided Reinforced Vinyl Tubing	100ft./box

DT PART#	I.D.	I.D. Tolerance	I.D. Max	I.D. Min	Length (ft)	Roll Weight (Lbs)	Working Pressure (PSIG)	Temperature (°F)
7-14B	0.250	0.0080	0.258	0.244	100	5.04	206	140
7-38B	0.375	0.0150	0.390	0.360	100	7.17	183	140
7-12B	0.500	0.0250	0.510	0.475	100	8.07	135	140
7-58B	0.625	0.0300	0.634	0.595	100	12.60	110	140
7-34B	0.750	0.0350	0.757	0.715	100	17.13	100	140

- Reinforced polyester caliber 300-500
- Hardness: 78-80 Shore A
- Recommended working temp 41°F - 140°F