

DIVERSITECH
PN# 981

 **MADE IN USA**


SUPER CHANGE™

FAST & EASY R22 SYSTEM RETROFIT

 ALL OILS
SUPER CHANGE™
HFC REFRIGERANT

- Eliminates oil change out
- Replaces line set flush
- Boosts oil return


**AMERICA'S
FASTEST
SYSTEM
CHANGE-OUT
SOLUTION**

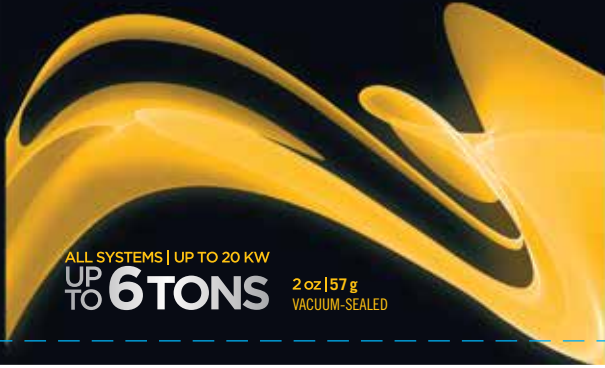

ALL SYSTEMS | UP TO 20 KW
UP TO 6 TONS

2 oz | 57 g
VACUUM-SEALED

THIS END UP FOR CHARGING

This can is in a vacuum and uses the system's own refrigerant as a propellant.
ENSURE SYSTEM IS FULLY CHARGED WITH REFRIGERANT.

1. TURN UNIT OFF.
2. Confirm piercing pin is below washer and connect hose to can.
3. Attach hose fitting to low side service port and then purge air from hose.
4. Turn valve handle clockwise to pierce can.
5. Turn valve handle counterclockwise to **CHARGE** can with refrigerant (can may get warm).
6. While inverted, TURN UNIT ON to empty can.
7. Once can is empty, remove hose fitting from low side service port.

NO RUNTIME REQUIRED



WARNING

Flammable liquid and vapor. Causes mild skin irritation.
Wear protective gloves and eye protection. If skin irritation occurs: Get medical attention.
SDS available upon request. DO NOT EXCEED 300 PSI/20.7 BAR ON CAN
Diversitech Corporation, 6650 Sugarloaf Parkway, Suite 100, Duluth, GA 30097
Telephone: 678.542.3600 Emergency Chemical Telephone: 1.800.255.3924

Tech Hotline: 1.866.548.3644
www.diversitech.com for instructions & videos
PROFESSIONAL HVAC/R USE ONLY



PN# 981
DOC140948

3.875 x 7