


**DIVERSiTECH**<sup>®</sup>  
993KIT

# BOOST JUICE™

HVAC/R PERFORMANCE ENHANCER

ALL SYSTEMS | UP TO 20KW  
**UP TO 6 TONS**

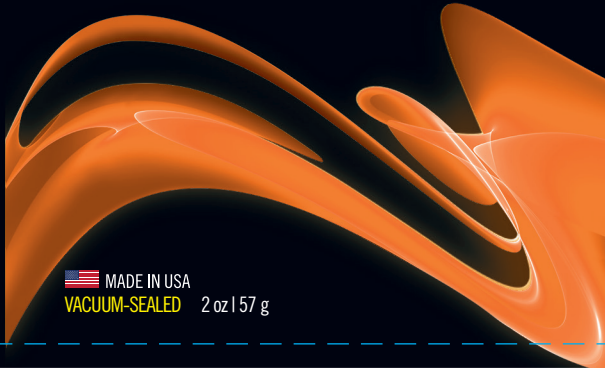

 **MADE IN USA**  
**VACUUM-SEALED** 2 oz | 57 g

**THIS END UP FOR CHARGING**

This can is in a vacuum and uses the system's own refrigerant as a propellant.

**ENSURE SYSTEM IS FULLY CHARGED WITH REFRIGERANT.**

1. TURN UNIT OFF.

2. Confirm piercing pin is below washer and connect hose to can.

3. Attach hose fitting to low side service port and then purge air from hose.

4. Turn valve handle clockwise to pierce can.

5. Turn valve handle counterclockwise to **CHARGE** can with refrigerant (can may get warm).

6. While inverted, **TURN UNIT ON** to empty can.

7. Once can is empty, remove hose fitting from low side service port.

## NO RUNTIME REQUIRED



### WARNING

Flammable liquid and vapor. Causes mild skin irritation. May cause an allergic skin reaction. Harmful to aquatic life.

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Wear protective gloves and eye protection. Avoid breathing mist, vapor or spray.

Avoid release to the environment.

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. In case of fire, DO NOT use water, steam, use carbon dioxide, dry chemical powder, alcohol-resistant foam or water spray. If skin irritation or rash occurs: Get medical attention. Specific treatments: see first aid measures on this label.

Take off contaminated clothing and wash it before reuse.

Dispose of contents/container in accordance with local/regional/national regulations

SDS available upon request. DO NOT EXCEED 300 PSI/G/20.7 BAR ON CAN

DiversiTech Corporation 6550 Sugarloaf Parkway, Suite 100, Duluth, GA 30097

Telephone: 678.542.3600 Emergency Chemical Telephone: 1.800.255.3924

**Tech Hotline: 1.866.548.3644**  
**www.diversitech.com**

**PROFESSIONAL HVAC/R USE ONLY**



PH# 993KIT  
DOC143035