

6

5

4



3

2

1

**\*ALL DIMENSIONS SHOWN ARE FINAL DIMENSIONS POST DIP**

REVISIONS				
REV.	DESCRIPTION	DRAWN BY	APPR BY	APPR DATE

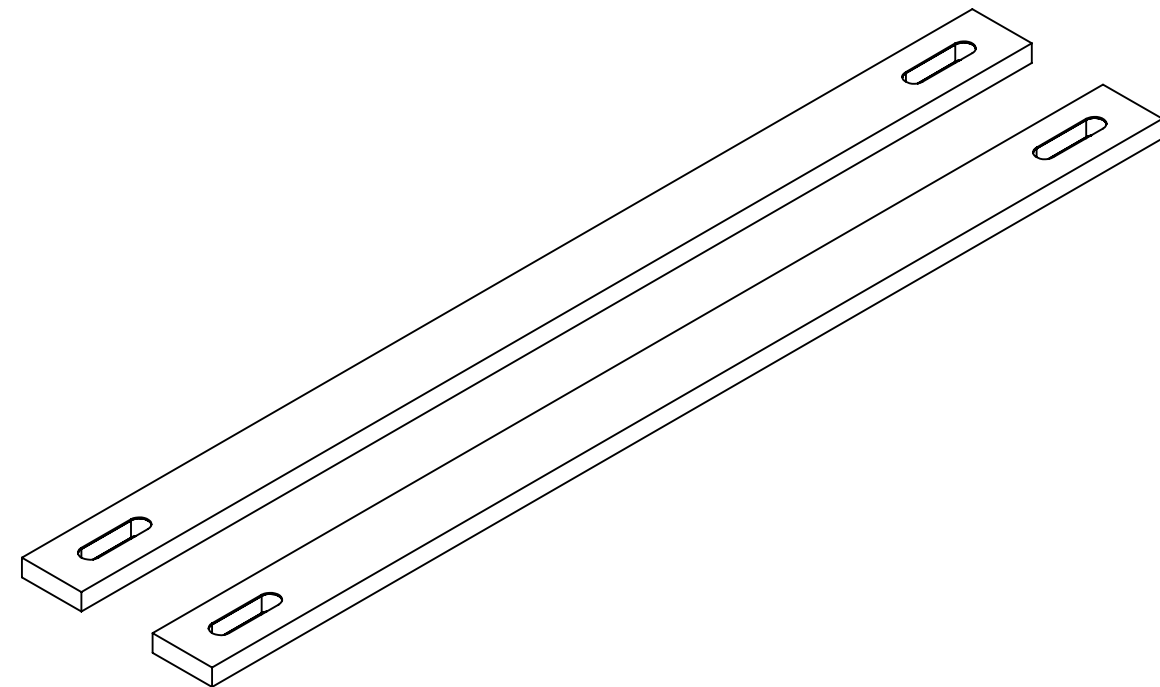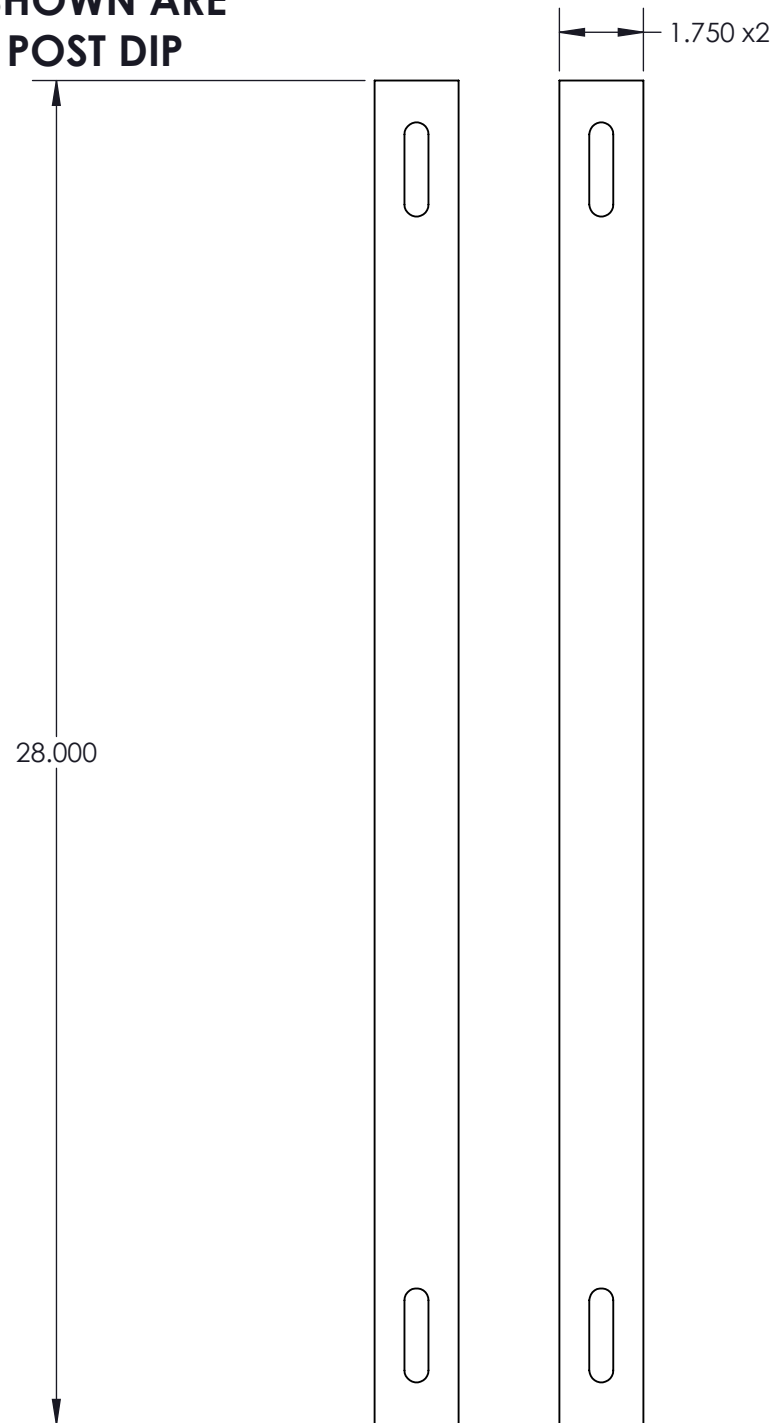

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	AC512	VIBRATION ISOLATION KIP-RT FOR QSMS1202	2

ALL DRAWINGS AND WRITTEN MATERIAL CONTAINED HEREIN ARE THE PROPERTY OF DIVERSITECH CORP AND MAY NOT BE DUPLICATED OR DISCLOSED AT ANY TIME UNLESS APPROVED IN WRITING BY DIVERSITECH CORP  INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5-2009 DIMENSIONING AND TOLERANCING STANDARDS	UNLESS OTHERWISE SPECIFIED DIMENSIONS & TOLERANCES ARE IN <b>INCHES</b>		DEBURR ALL SHARP EDGES *DO NOT SCALE*		TITLE	SIZE
	DIM RANGE 0.02 - 0.12 0.12 - 0.24 0.24 - 1.18 1.18 - 4.72 4.72 - 15.75 15.75 - 39.4 39.4 +	TOLERANCE ±0.008 ±0.012 ±0.020 ±0.031 ±0.047 ±0.079 ±0.118			KIP-RT Kinetics Noise Control	
THIRD ANGLE PROJECTION 			NAME: apadilla DATE: 8/28/2019	DRAWING NUMBER: <b>QSAC5102</b> REVISION:		
SCALE: 1:1				SHEET 1 OF 2		

6

5

4



3



2

1

NOTES:

1. MATERIAL: FIBER GLASS
2. COLOR: GREEN OR BLACK
3. FINISH: CURED RESIN
4. LOAD: BEST IF USED BETWEEN 2.5 PSI AND 15 PSI

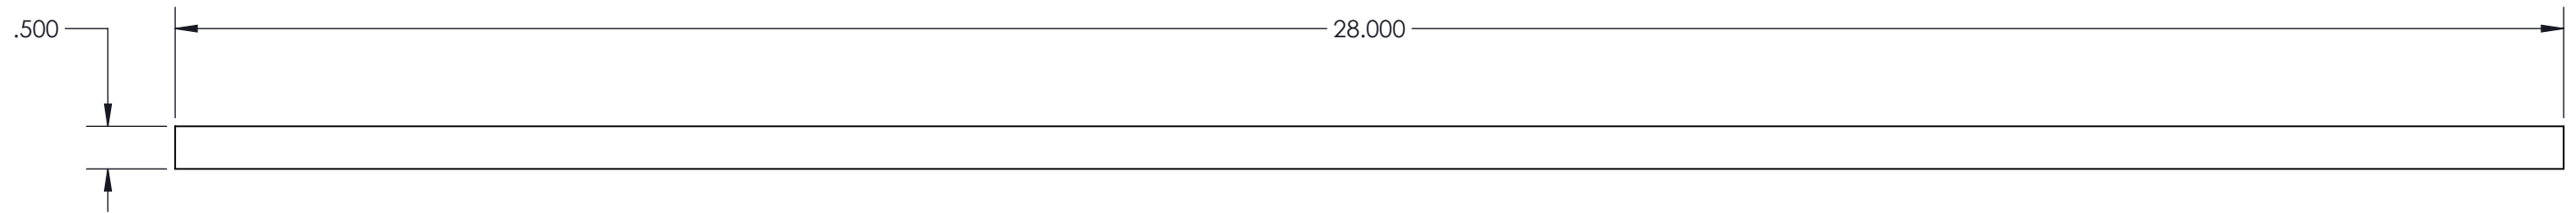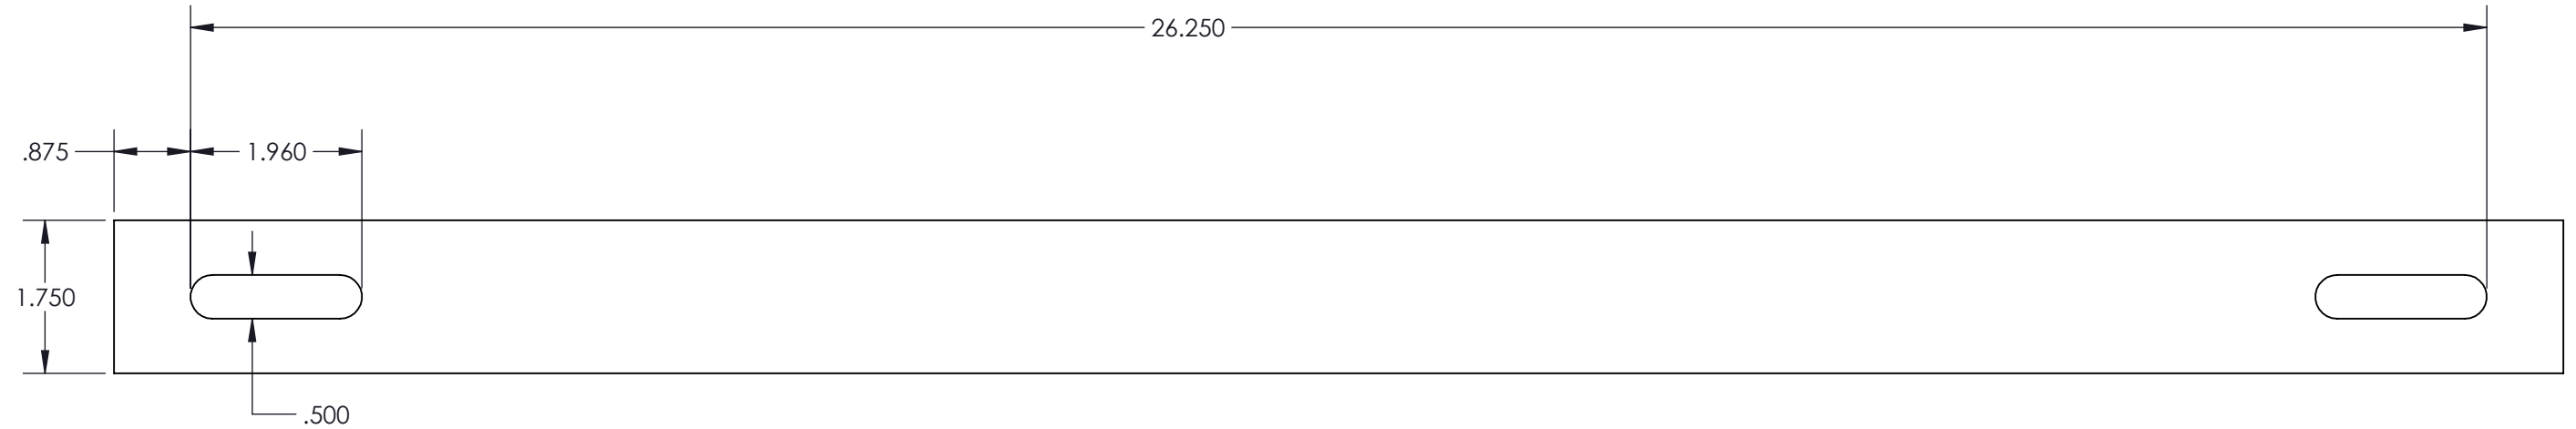

<p>ALL DRAWINGS AND WRITTEN MATERIAL CONTAINED HEREIN ARE THE PROPERTY OF DIVERSITECH CORP AND MAY NOT BE DUPLICATED OR DISCLOSED AT ANY TIME UNLESS APPROVED IN WRITING BY DIVERSITECH CORP</p>	<p>DEBURR ALL SHARP EDGES *DO NOT SCALE*</p>			TITLE		SIZE
				KIP-RT kit for QSMS1202		<b>B</b>
<p>INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5-2009 DIMENSIONING AND TOLERANCING STANDARDS</p>	<p>THIRD ANGLE PROJECTION</p> 	NAME	DATE	DRAWING NUMBER	REVISION	
		DRAWN BY		<b>QSAC5102</b>		
		CAD APPR.				
				SCALE: 1:8	SHEET 2 OF 2	