


The safe & affordable install

Applicable for residential or light commercial installations



Wall Bracket SPECS QSWB1000

A Close Up:

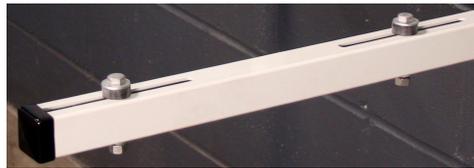

Our wall bracket works great with mini split units & is slotted for quick mounting.

Shelf depth 26"

*Powder Coated.

The QSWB1000 includes anti-vibration isolation using four 50-durometer rubber washers. It also incorporates galvanized hardware to secure the unit to the wall bracket.

The QSWB1000 is made of 11-gauge square, steel tubing which not only cuts down on vibration but is also able to hold up to 500 lbs.

Patent Pending

Quick-Sling 391 West Water Street Taunton, MA 02780

P:1.800.699.0453 F:1.800.699.0423

www.Quick-Sling.com

*As of 1/1/2015 Quick-Sling offers a 2-year warranty on steel & workmanship; Quick-Sling products are coated in accordance with ASTM D3451-06.